

TANDEM AXLE JEEP

MODEL: LPJ-40T-2




TRAILER FEATURES



SINGLE DROP PROFILE

Designed with a low 5th wheel height to maintain a low center of gravity.

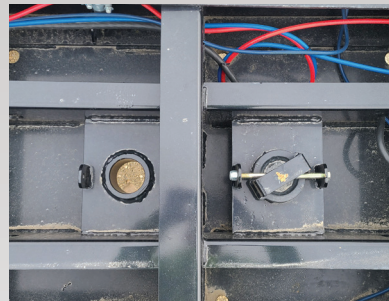

DUAL KING PIN SETTING

Equipped with (2) king pin positions for use with Tandem & Tridrive trucks.

SLIDING FIFTH WHEEL

Multiple positions over a 72" slide range allows for flexibility in accommodating weight equalization.




REAR SKID RAMPS

The rear tail frame is designed for use with all types of lowbed trailers.

SUSPENSION

Standard equipped with Hendrickson HT300 and 25,000 lb axles.

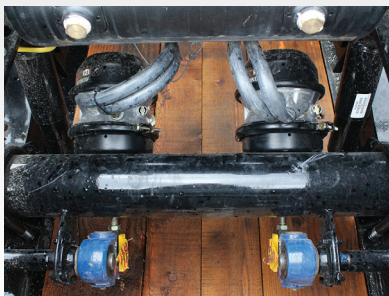

ALUMINUM FENDERS

Aluminum checker fenders on gooseneck provide protection for the trailer and the cargo loaded on the trailer.

SPECIFICATIONS

MODEL	LPJ-40T-2
LENGTH	26'3"
WIDTH	8'6"
KING PIN	14" & 27" Setting
KING PIN HEIGHT	51"
LANDING GEAR	(2) speed crank landing legs - crank located on street side
FIFTH WHEEL	78" Slide Range & Dual Pin Lock Assembly
SUSPENSION	(2) 30,000 lb. air ride suspension at 50" axle spacing Dump Valve & Weigh Gauge Mounted on Side Rail
AXLES	(2) 25,000 lb. axles at 77" track (8'6" wide over tires) Type 30/30 Air Chambers & Stemco Auto Slack Adjusters
HUBS & DRUMS	10 Stud Piloted Parallel Hubs & Cast Drums c/w Long Studs
WHEELS	Aluminum 10 Stud Pilot-Mount 8.25" x 22.5 Disc Wheels
TIRES	275/70-22.5 Low Profile Radial Tires

ELECTRICAL SYSTEM

All Air & Electrical Is CMVSS Approved
Air Scale & Manual Dump Valve in Enclosed Box
LED Lamps & Integrated Wiring System
(4) LED Round Tail/Turn/Stop Lights in Rear Frame
¾" Amber Bullet Lights on Front Corner
Fender Brackets

FENDERS

Aluminum Checker Plate Fenders on Goose-neck Side Rail

MUDFLAPS

(2) 24" x 24" Black Rubber Mounted on Gooseneck & at Rear

FINISH

Sandblasted, Epoxy Primer & PPG Urethane Paint- Black
Document Holder Installed on Frame Side Rail

SAFETY TAPE


Applied as per regulations

WARRANTY

1st year - 100% parts & labour
2nd year - 50% parts & labour
3rd to 5th year - 50% parts only

OPTIONS

- Available in different frame profiles and lengths
- Tridrive tractor compatible and tridem suspension
- Rear liveroll
- Telescopic adjustable swing up dolly legs
- Air-Weigh on-board scale system
- Lightweight wheels, hubs, and drums

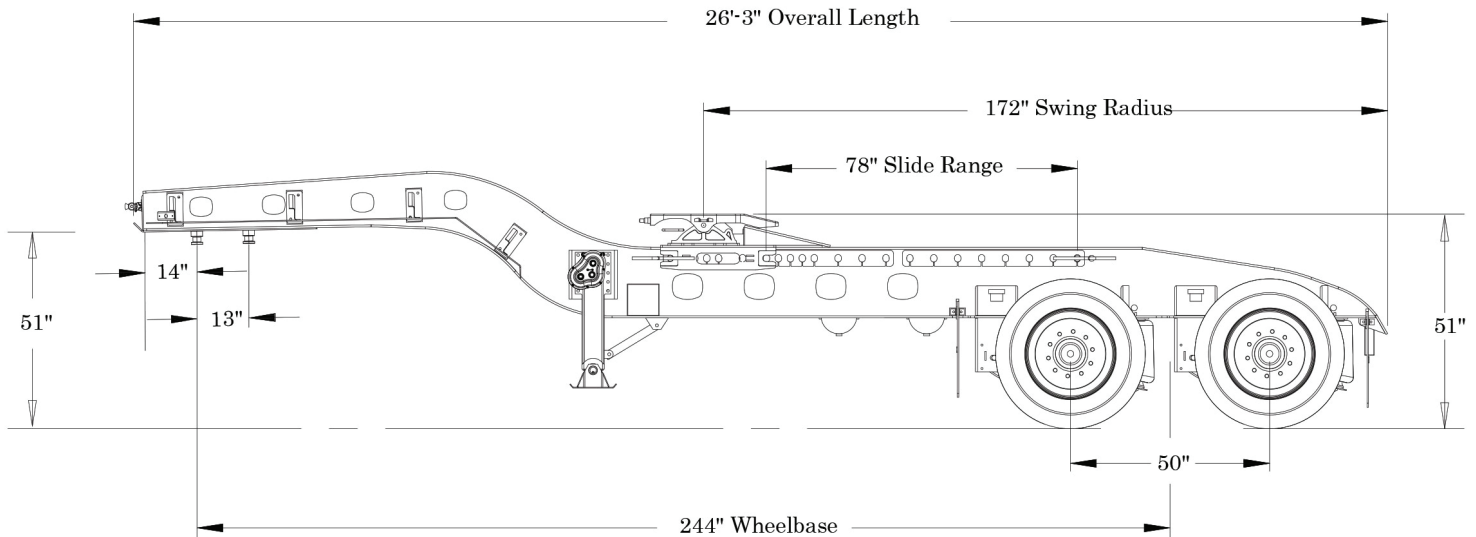

Product improvement is an ongoing process. The manufacturer reserves the right to change any specifications or components on any or all products without prior notice and is under no obligation to undertake modifications to units manufactured to prior changes in specifications.